



ALMAG-BAT

Electromagnetic Flowmeter

ALMAG-BAT Series

GENERAL

SmartMeasurement's ALMAGBAT is a battery powered, IP68 electromagnetic flowmeter mainly used in water applications. The ALMAGBAT's display/converter module is equipped with a replaceable lithium battery that can be used for up to five years of continuous operation. The operation period can be extended by using a high-capacity battery instead of our standard lithium battery. Remote communication can be achieved via a base-station-type radio communication network system. With a centrally located base station, the coverage radius can be up to 1000 meters. Base stations within a close proximity (SRD mode) may operate on 928 MHz frequency. For greater distances, GPRS or CDMA mobile network communications can be used to transmit data to any central office. The ALMAGBAT comes standard with a rugged IP68 die-cast aluminum enclosure, which allows the device to be used in both indoor and outdoor submersible applications.

FEATURES

- Available in 2" - 12" (50-300 mm) sizes
- 5 years with extended battery life (optional)
- GPRS, CDMA and SRD radio communications
- Designed for clean water; fluid conductivity $\geq 20 \mu\text{S}/\text{cm}$
- IP68 enclosure - tamper-sealed
- Available FEP liner suitable for vacuum applications
- Excellent accuracy; $\pm 1\%$ of reading
- Built-in pulse output for data-logging or telemetry
- Empty pipe detection
- NIST traceable calibration certificate




SPECIFICATIONS

- | | | | |
|------------------------------|--|-------------------------------------|---|
| • Size: | 2" - 12" (50-300mm) | • Electrode & Grounding: | Stainless Steel #316L
Hastelloy C
Titanium |
| • Measuring Range: | 1.5m/s ~10 m/s-bi-directional
5~33 feet/sec bi-directional | • Display: | 5 digits for rate, 10 digits for total |
| • Temperature: | 15~175°F (-10~80 °C)-Polyurethane
-4~158°F (-20~70°C) - Neoprene
-40~300°F (-40~150°C) - FEP
-40~300°F (-40~150°C) - PTFE | • Units: | GPM, L/s, L/m, m ³ /m, m ³ /h, Cubic
Feet/Minute, Acre-Inch/hour |
| • Material: | | • Resistance excitation: | 250mA excitation current:50 ~ 60Ω |
| Measuring Tube: | Stainless Steel #304 | • Ambient TemperatureOr: | -13 to 140 °F (-25 to 60 °C) |
| • Flange material: | Carbon Steel (std), SS #304 and (opt) #316 | • Power/Battery: | Battery pack with 4 Lithium 3.6V "D"
batteries, replacable std battery life 2.5 years
5 years with extended battery life (opt)
External power option (uses 12-32 V _{DC} 30 mA),
Lithium batteries serve as backup in power
failure (10 year life) |
| • Flange type: | ANSI, DIN and JIS flanges | • Accuracy: | $\pm 1.0\%$ of Reading (Velocity>0.6m/s)
$\pm 1.0\%$ of Reading $\pm 2\text{mm/s}$ (Velocity $\leq 0.6\text{m/s}$) |
| • Coil Housing: | Carbon Steel (std)
Stainless Steel #304 (opt)
Stainless Steel #316 (opt) | • Outputs: | pulse, opto-isolated, 30 V _{DC} at 10 mA max, Pulse
rate selectable RS485 and GPRS |
| • Liners: | Polyurethane
Neoprene
PFA, PTFE | | |
| • Protection: | IP67, IP68 (opt) | | |
| • Fluid Conductivity: | must be $\geq 20 \mu\text{S}/\text{cm}$ | | |

DISPLAY OPTIONS


Standard Integral IP68 type

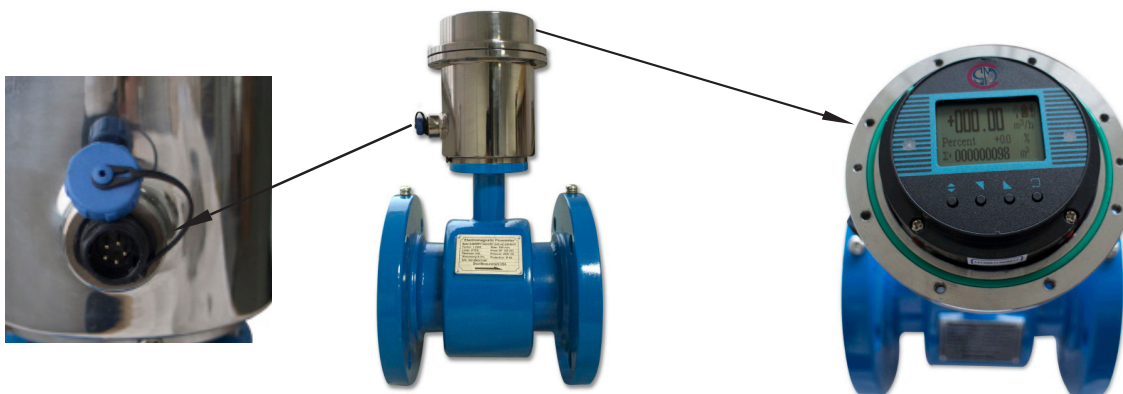

GPRS function type



Battery Powered Transmitter

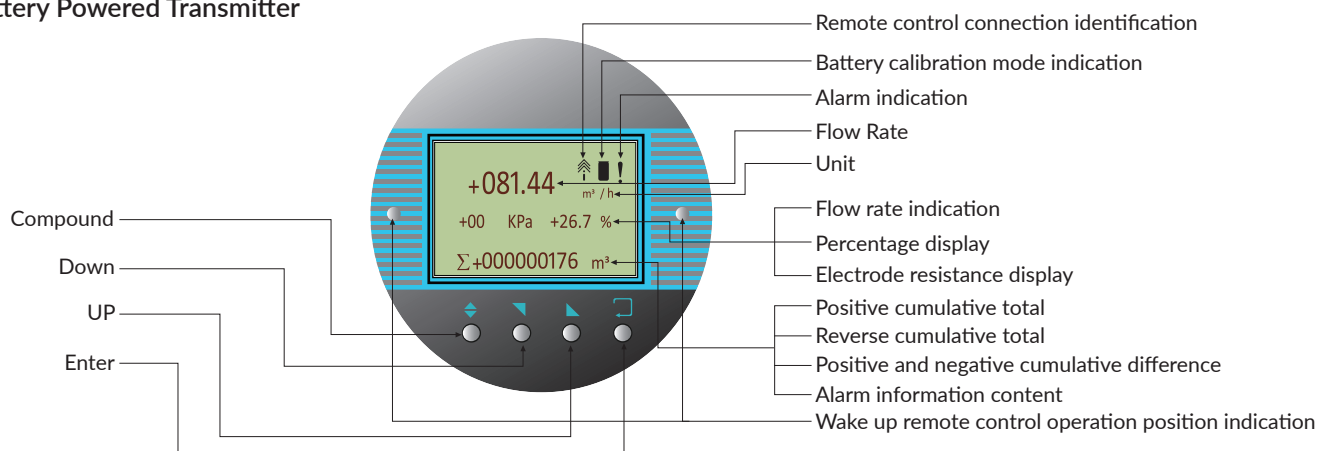

BATTERY

- LI-SOCL2 battery (part number: ER34615)
- Rating: 3.6V_{DC}, 19000 mAh
- Max continuous working current: 200 mA
- Max pulse current: 400 mA
- Working temperature: -65~185 °F (-55~85 °C)
- Dimensions: $\Phi 1\frac{3}{8} \times 2\frac{7}{16}$ " ($\Phi 34.2 \text{ mm} \times 61.5 \text{ mm}$)
- Weight: (3.75 oz) 106 g


Note; Optional 5 year life battery available

• Battery life:

Line Size

EXCITATION FREQUENCY	$\frac{1}{8}$ ~6" (3-150 mm)	8~14" (200-350 mm)	16~24" (400-600 mm)
$\frac{1}{15}$ Hz	40 months	32 months	30 months
$\frac{1}{30}$ Hz	66 months	60 months	50 months
Notes: Excitation frequency			
$\frac{1}{15}$ Hz - means flow is measured every 15 seconds			
$\frac{1}{30}$ Hz - means flow is measured every 30 seconds			

DIMENSIONS

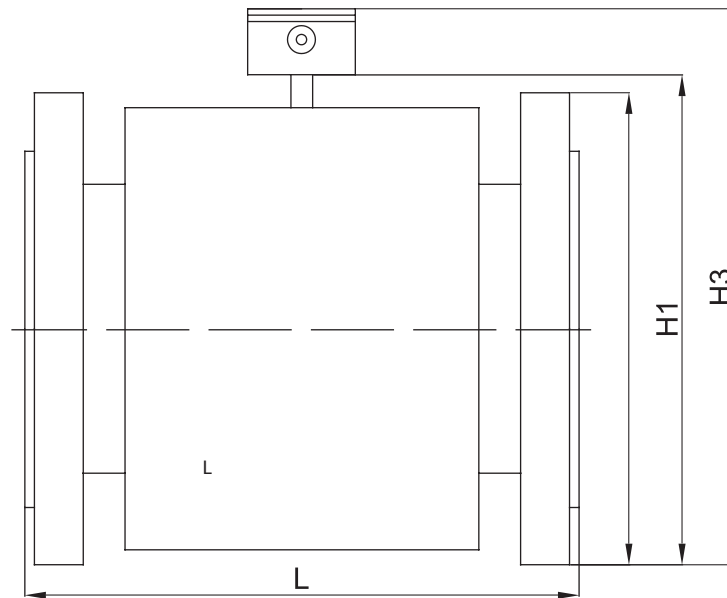

NOMINAL DIAMETER	NORMAL PRESSURE (PSI/MPa)	DIMENSIONS - INCHES (mm)		REMOTE	INTEGRAL IP65	INTEGRAL IP68	WEIGHT lbs.(Kg)
		L	H1			H3	
2" (50 mm)	362 (2.5)	7.87 (200)	7.75 (197)	10.59 (269)	12.83 (326)	13.26 (337)	19.8 (9)
2 ½" (65 mm)		9.84 (250)	8.66 (220)	11.49 (292)	13.74 (349)	14.17 (360)	24.3 (11)
3" (80 mm)	232 (1.6)	9.84 (250)	8.93 (227)	11.77 (299)	14.01 (356)	14.44 (367)	29 (13)
4" (100 mm)		9.84 (250)	10.11 (257)	12.95 (329)	15.19 (386)	15.62 (397)	33 (15)
5" (125 mm)	145 (1.0)	9.84 (250)	11.37 (289)	14.21 (361)	16.45 (418)	16.88 (429)	42 (19)
6" (150 mm)		11.81 (300)	12.51 (318)	15.35 (390)	17.59 (447)	18.03 (458)	53 (24)
8" (200 mm)		13.77 (350)	14.92 (379)	17.75 (451)	20 (508)	20.43 (519)	71 (32)
10" (250 mm)		17.71 (450)	16.88 (429)	19.72 (501)	21.96 (558)	22.40 (569)	104 (47)
12" (300 mm)		19.68 (500)	18.97 (482)	21.81 (554)	24.05 (611)	24.48 (622)	148 (67)

** Please contact your local SmartMeasurement application engineer
You also need to provide the following information:

TYPE OF LIQUID
FULL SCALE FLOW
LINE SIZE
PRESSURE & TEMPERATURE

Please provide the name of your fluid, including operating PH and conductivity.

Please specify maximum and minimum flow rates in units must be m³/hr., LPM, or GPM

Please indicate a nominal pipe diameter as well connection type (flange, threaded, etc..)

We will calibrate your flowmeter as close to your operating conditions as possible.

ALMAG BAT SERIES

EXAMPLE: ALMAGBAT-F-100-O-3-IN-1.6-H-1-15-O-NX-NN-NN

ALMAG BAT	**_	*	*_	**	**_	*	*	*_	*	*	*_	*	*	*	DESCRIPTION
Flange type	F														Connection
Ceramic type - 2"~8" (DN50~DN200)	C														
Sanitary - 2"~4" (DN50~DN100)	S														
Threaded type - 2" (DN50)	T														
Wafer type - 2"~8" (DN50~DN200)	W														
DN50~DN300 (2"~12")		**													Line Size
316 stainless steel			0												Electrode
Nickel			1												
Hast C			2												
Tan			3												
Ti			4												
Ceramic			C												
Chloroprene Rubber (Neoprene)				3											Liner material
PU (polyurethane)				4											
PTFE				5											
PFA				6											
F46				7											
Hard Rubber				8											
Ceramic				C											
Integral type						IN									Transmitter
Remote type - with standard 5m cable						RE									
Max Pressure 2.5Mpa - up to 3" (DN80)							2.5								Pressure
Max Pressure 1.6Mpa - up to 6" (DN150)							1.6								
Max Pressure 1.0Mpa - up to 24" (DN600)							1.0								
Up to 170°F (+80°C)								E							Temperature
Up to 300°F (+150°C)								H							
Not Needed									0						Grounding electrode/ring
Grounding electrode									1						
SS # 304 grounding ring									2						
Every 15 seconds										15					Excitation frequency
Every 30 seconds										30					
None											0				Communication
RS485											1				
GPRS											2				
CDMA											3				
None												NX			Explosion proof
SS # 304 flow tube, CS coil housing and connection													NN		Materials
SS # 304 flow tube, CS coil housing and SS # 304 connection													C304		
SS # 304 flow tube, coil housing and connection													304		
None													NN		Option
With CS install flange													IF		

